



UFI FILTERS MASK FFP2 MASK DEFENDER



UFI FILTERS MASK DEFENDER



Available from
July 2020


MASK DEFENDER TECHNICAL DETAILS

Airlaid in polypropylene

Adheres well to face shape and keeps it dry

Spunbond

Protective layer

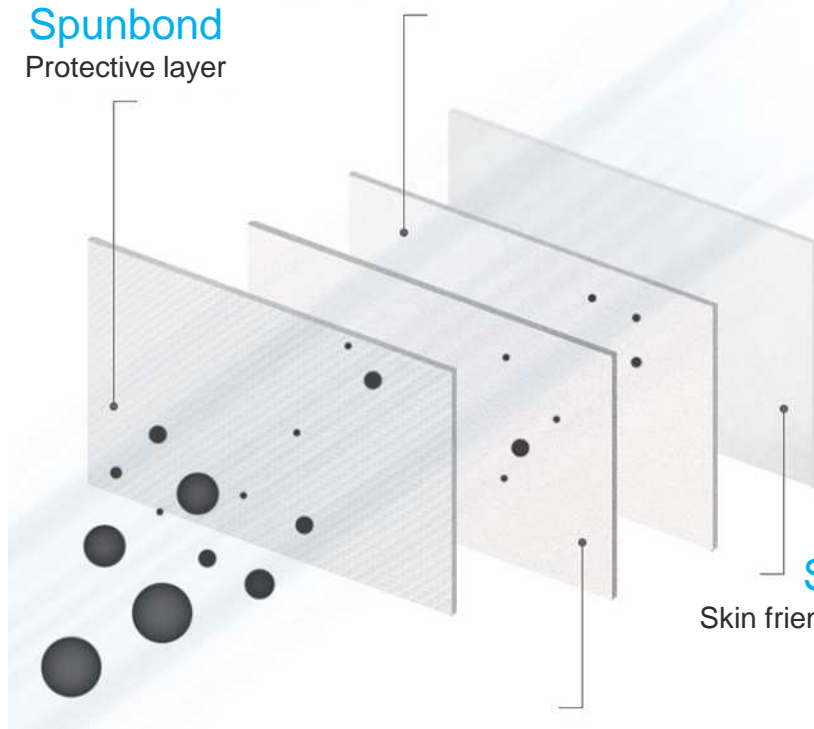

Four layers of protection:

Filtration efficiency	≥ 98%	@ 0.6µm, 95l/min
Inhalation resistance	≤ 2.4mbar	@ 95l/min
Exhalation resistance	≤ 3.0mbar	@ 160l/min


Meltblown

Guarantees high filtration efficiency and protection from external agents – viruses and dust



MASK DEFENDER CHARACTERISTICS

- Four-layers face mask with ear holder and adjustable nose clip. Ultrasonically welded
- Produced in accordance to EN 149:2001+ A1:2009 standards
- The production line is in UFI Filters Shanghai
- Masks are supplied in single plastic bags to preserve the cleanliness and contamination
- Must be stored in well-ventilated, dark and dry environment, away from fire and pollution
- Recommended storage conditions: temperature -20C°~ +30C° and relative humidity less than 85%
- Shelf Life: 3 years

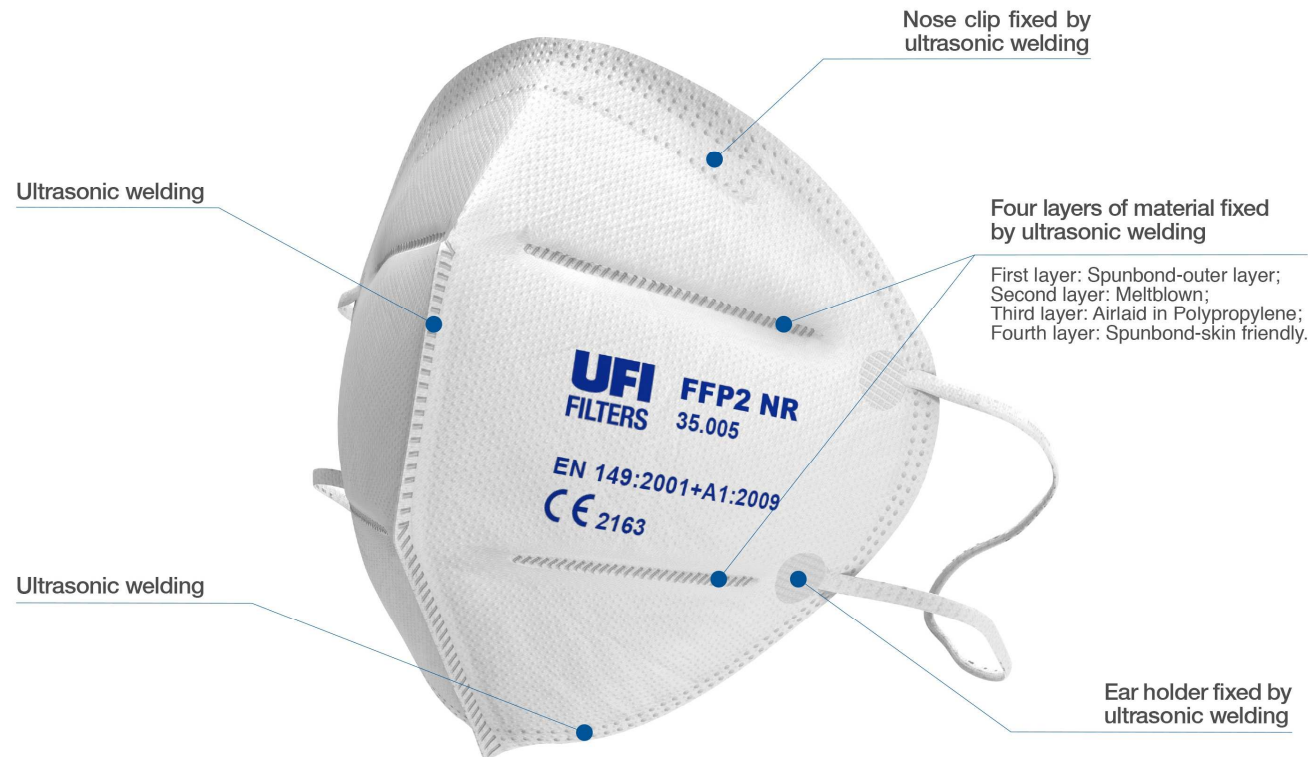



THANK YOU